



(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(22) Date de dépôt/Filing Date: 2007/10/23

(41) Mise à la disp. pub./Open to Public Insp.: 2008/05/03

(30) Priorité/Priority: 2006/11/03 (US60/856,313)

Priorité: 03 Nov. 2006 (USA)

Published: 03 May 2008

Granted: ?

(51) Cl.Int./Int.Cl. *E06B 7/02* (2006.01),
F16K 15/03 (2006.01)


(71) Demandeur/Applicant:
JOASIL, MICKAEL COLLINS, CA

(72) Inventeur/Inventor:
JOASIL, MICKAEL COLLINS, CA

(74) Agent: MACRAE & CO.

(54) Titre : SYSTÈME DE VENTILATION POUR FENÊTRES À VITRES MULTIPLES

(54) Title: VENTILATION SYSTEM FOR MULTI-PANED WINDOWS

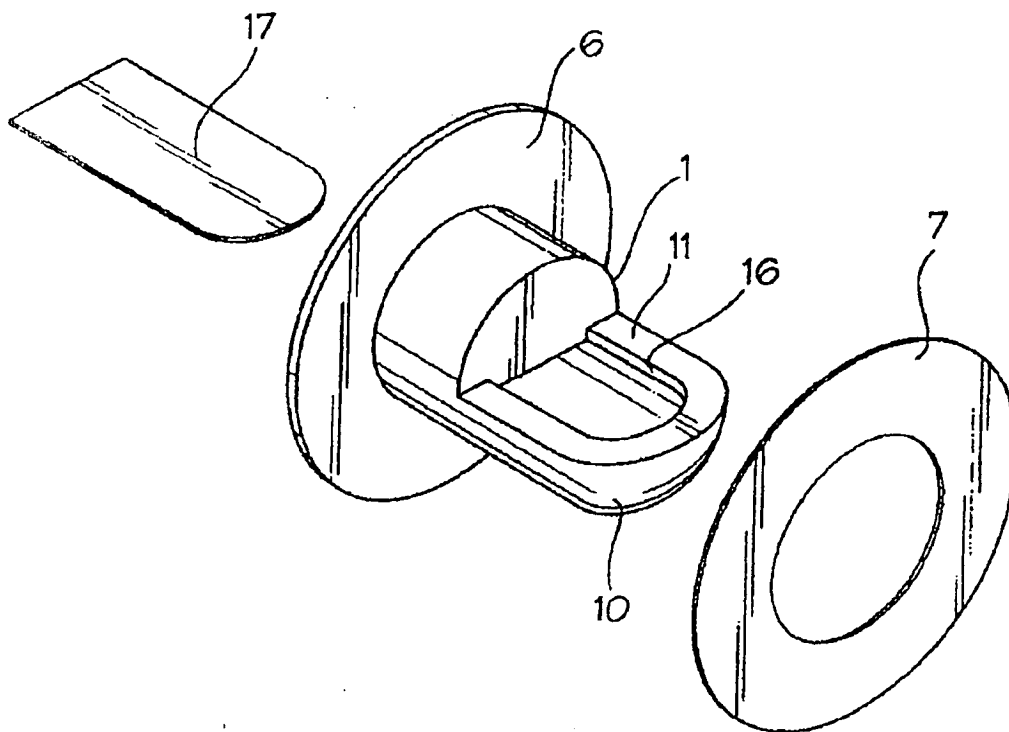

(57) Abrégé/Abstract:

A unidirectional valve for venting moisture from a window having at least two panes or lights, the panes or lights defining an air space therebetween, is provided. The valve includes: an elongated body having an interior passage formed lengthwise therein, wherein at least a portion of the elongated body is adapted to be inserted directly through a window pane and into the air space formed between the panes; at least one resilient plate pivotally connected to the elongated body; wherein the resilient plate moves in response to changes in fluid pressure within the air space formed between the panes of the window, and wherein the movement of the plate opens the interior passage for allowing moisture-laden air to pass therethrough and out of the air space or closes the interior passage for preventing air from flowing back into the air space between the panes.



ABSTRACT

A unidirectional valve for venting moisture from a window having at least two panes or lights, the panes or lights defining an air space therebetween, is provided. The valve includes: an elongated body having an interior passage formed lengthwise therein, wherein at least a portion of the elongated body is adapted to be inserted directly through a window pane and into the air space formed between the panes; at least one resilient plate pivotally connected to the elongated body; wherein the resilient plate moves in response to changes in fluid pressure within the air space formed between the panes of the window, and wherein the movement of the plate opens the interior passage for allowing moisture-laden air to pass therethrough and out of the air space or closes the interior passage for preventing air from flowing back into the air space between the panes.

CLAIMS

1. A venting system for windows, comprising:
 - (a) at least one window, wherein the window further includes at least a first pane and a second pane, and wherein the panes define an air space therebetween;
 - (b) at least one unidirectional valve for allowing moisture-laden air to flow out of the air space formed between the panes, wherein a portion of the valve is adapted to be inserted through an aperture formed in the window pane and into the air space, and wherein the valve further includes:
 - (i) an elongated body having an interior passage formed lengthwise therein;
 - (ii) at least one flexible plate in pivotal contact with the elongated body;
 - (iii) wherein the flexible plate moves in response to changes in fluid pressure within the air space formed between the panes of the window, and wherein the movement of the plate opens or closes the interior passage.
2. The system of claim 1, further comprising sealing means for sealing the at least one unidirectional valve to a window pane.
3. The system of claim 1, wherein the at least one window is an insulated glazing unit.
4. The system of claim 1, wherein the at least one flexible plate is seated against the elongated body when the fluid pressure within the air space defined by the panes is less than the fluid pressure on the outside of the panes for closing the valve; and wherein a portion of the at least one flexible plate is separated from the elongated body when the fluid pressure within the air space defined by the panes exceeds the fluid pressure outside of the panes for opening the valve.
5. The system of claim 1, wherein the elongated body is generally cylindrical in shape.
6. The system of claim 1, wherein the elongated body further comprises anchoring means formed at one end thereof for securing the valve within the pane once it has been inserted therein.

13. The valve of claim 8, wherein the resilient plate is hingeably attached to the elongated body.
14. The valve of claim 8, wherein the valve is adapted to be used with insulated glazing units.
15. A method for venting moisture from a multi-paned window, the method comprising:
 - (a) providing a sealed window, wherein the window further includes an inner pane and an outer pane, and wherein the panes define an air space therebetween;
 - (b) forming at least one opening in at least one of the panes;
 - (c) inserting a unidirectional valve into each opening, wherein each valve further includes:
 - (i) an elongated body having an interior passage formed lengthwise therein;
 - (ii) at least one plate pivotally connected to the elongated body;
 - (iii) wherein the plate moves in response to changes in fluid pressure within the air space formed between the panes of the window, and wherein the movement of the plate opens or closes the interior passage; and
 - (iv) wherein moisture passes through the interior passage and out of the air space when the valve is the open position.
16. The method of claim 15, further comprising:
 - (a) inserting at least one unidirectional valve in the lower portion of the inner pane such that the resilient plate is facing in an upward direction; and
 - (b) inserting at least one unidirectional valve in the upper portion of the outer pane such that the resilient plate is facing in a downward direction;
 - (c) wherein the placement of the valves in the inner pane and outer panes permits airflow through the air space formed between the panes when fluid pressure within the air space defined by the panes exceeds fluid pressure outside of the panes.
17. The method of claim 15, wherein the elongated body further comprises a substantially circular plate formed at one end thereof and perpendicular thereto, wherein the diameter

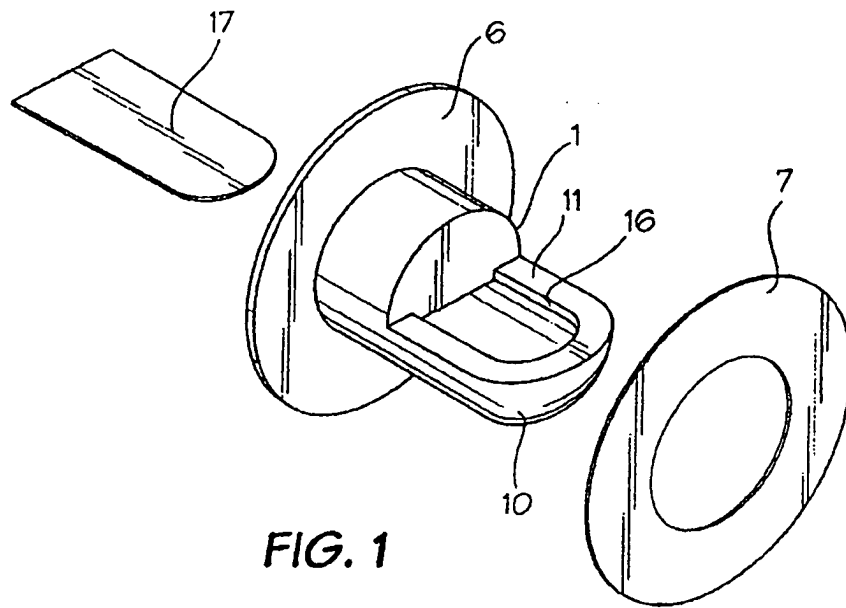


FIG. 1

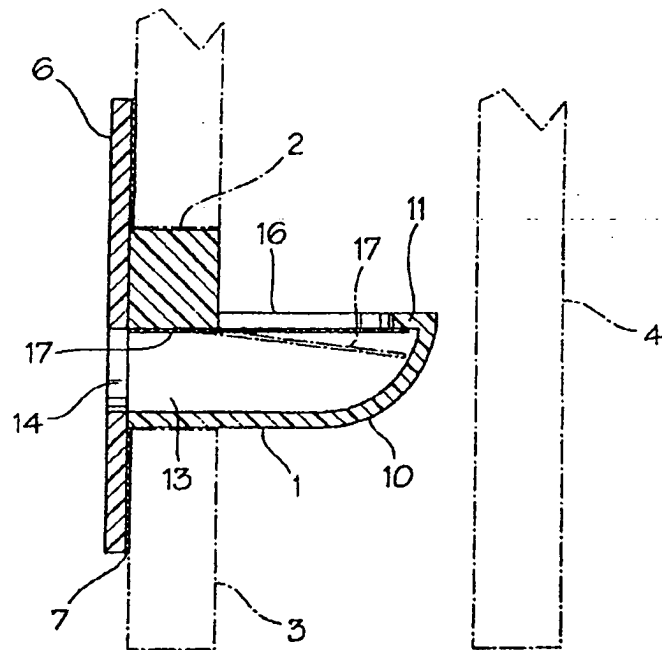


FIG. 2

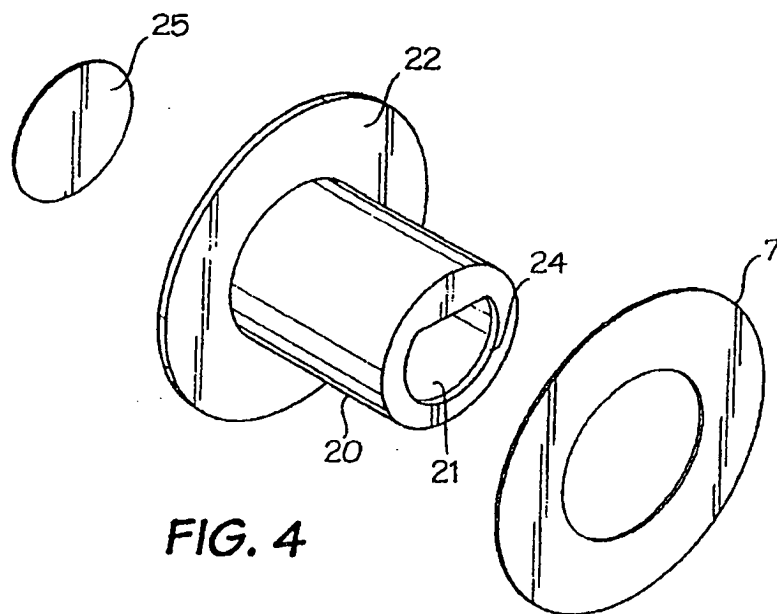


FIG. 4

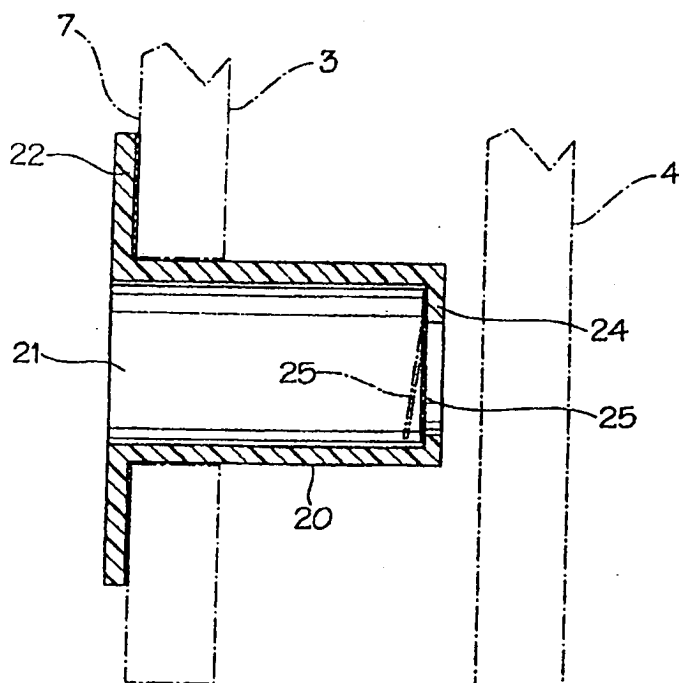


FIG. 5

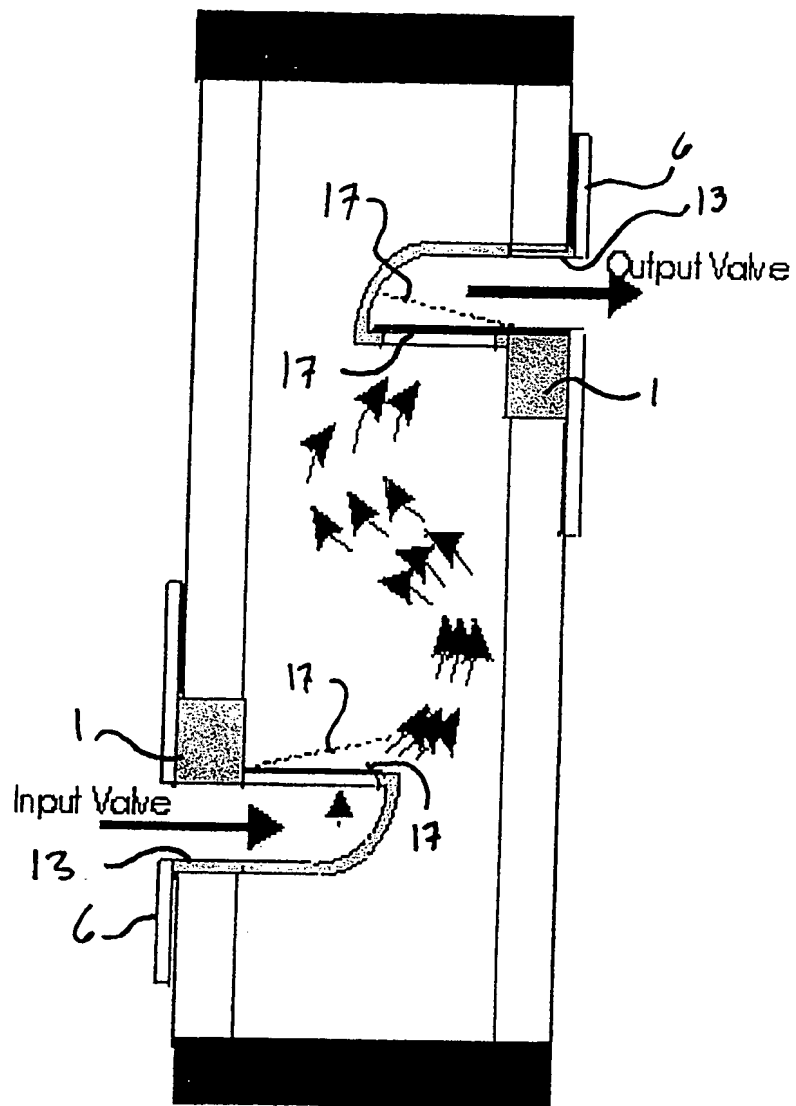


FIG. 7

VENTILATION SYSTEM FOR MULTI-PANED WINDOWS

BACKGROUND OF THE INVENTION

[0001] The described invention relates in general to ventilation systems for use with thermal window units, multi-paned windows, and/or windows having multiple lights, and more specifically to a unidirectional valve and valve system for allowing moisture and humid air to flow out of interior spaces formed between the panes or lights of a multiple glazing unit or similar item.

[0002] "Insulated glazing unit" or "insulating glass unit" (commonly referred to as IGU) is a set of two or more lights (i.e., separately framed pieces or panes of glass in a window or door) spaced apart from one another and hermetically sealed to form a single glazed unit with an air space between each light. An IGU typically functions to improve the thermal performance of glass when used in architectural applications. Another name often used in North America is "sealed insulating glass" (abbreviated SIG). The most common IGUs are double glazed, i.e., made with two lights of glass, and are therefore also referred to as "double glazing units" or "DGU" (particularly in Europe). IGUs having three or more lights, i.e. "triple glazing" are sometimes used in colder climates. IGUs are also commonly used as replacement windows.

[0003] An IGU made of glass is called insulated glass, referring specifically to the thermal insulating properties of the IGU. Another term used for this technology is "insulating glass" although the glass itself has few insulating properties; rather it is the air space between the glass layers that provides thermal insulation. The air space between the panes or lights may be filled with air or an inert gas like argon or krypton which provides the insulating properties. Typically, the air space is filled with desiccant to reduce condensation and improve insulating performance. Less commonly, most of the air is removed, leaving a partial vacuum, which drastically reduces heat transfer through convection and conduction. This is called evacuated glazing. Insulating "quality" refers to heat flow where the gap between lights is the insulating medium. The gap between panes or lights is usually 12mm to 20mm thick; however, the thickness of the gap does impact the insulating properties substantially. An air gap of about 16mm is considered optimal and is usually recommended for most applications.

therein and at least one flexible valve plate in pivotal contact with the elongated body. The flexible valve plate moves in response to changes in fluid pressure within the air space formed between the panes of the window and the movement of the plate opens or closes the interior passage, thereby opening or closing the valve.

[0007] In accordance with another aspect of the present invention, a unidirectional valve for venting moisture from a window having at least two panes, wherein the panes define an air space therebetween, is provided. This valve includes an elongated body having an interior passage formed lengthwise therein and at least a portion of the elongated body is adapted to be inserted through a window pane and into the air space formed between the panes. At least one resilient valve plate is pivotally or hingeably connected to the elongated body. The resilient valve plate moves in response to changes in fluid pressure within the air space formed between the panes of the window. The movement of the valve plate (i) opens the interior passage for allowing moisture to pass therethrough and out of the air space; or (ii) closes the interior passage for preventing moisture-laden air from flowing back into the air space between the panes.

[0008] In yet another aspect of this invention, a method for venting moisture from a multi-paned window is provided. This method includes providing a sealed window, wherein the window further includes an inner pane and an outer pane, and wherein the panes define an air space therebetween. At least one specifically-sized opening is drilled or otherwise formed in at least one of the panes and a unidirectional valve is inserted into each opening. Each valve further includes an elongated body having an interior passage formed lengthwise therein and at least one valve plate pivotally or hingeably connected to the elongated body. The valve plate moves in response to changes in fluid pressure within the air space formed between the panes of the window, and the movement of the plate opens or closes the interior passage thereby opening or closing the valve. Moisture-laden or humid air passes through the interior passage of the valve body and out of the interior air space when the valve is the open position. After the fluid pressure in the interior space between the panes has equalized relative to the fluid pressure on the exterior or outside of the window, the valve closes thereby preventing the backflow of humid air through the valve into the air space between the panes.

DETAILED DESCRIPTION OF THE INVENTION

[0017] Exemplary embodiments of the present invention are now described with reference to the Figures. Reference numerals are used throughout the detailed description to refer to the various elements and structures. In other instances, well-known structures and devices are shown in block diagram form for purposes of simplifying the description. Although the following detailed description contains many specifics for the purposes of illustration, a person of ordinary skill in the art will appreciate that many variations and alterations to the following details are within the scope of the invention. Accordingly, the following embodiments of the invention are set forth without any loss of generality to, and without imposing limitations upon, the claimed invention.

[0018] The present invention relates to unidirectional valves for use with multiple glazing units, insulated glazing units, insulated glass units, thermal window units, and the like, all of which are referred to generically herein as "multi-paned" windows. As previously indicated, a first general embodiment of this invention provides a venting system for multi-paned windows; a second general embodiment of this invention provides a unidirectional valve for venting moisture-laden air from a window having at least two panes; and a third general embodiment of this invention provides a method for venting humid air from within a multi-paned window. With reference now to the Figures, one or more specific embodiments of this invention shall be described in greater detail.

[0019] FIGS. 1-3 illustrate a first exemplary embodiment of a unidirectional valve for use with the present invention. As shown in FIG. 1, this valve includes an elongated tubular or semi-cylindrical body having a semi-cylindrical interior passage 13 formed lengthwise through at least a portion thereof. A generally circular plate 6 is formed integrally with or attached to one end of body 1, while a trough 10 is formed integrally with the other end of body 1. A semi-circular opening or hole 14 is centrally formed in circular plate 6 and a flat lip or flange 11 is formed around the top edge of trough 10 and defines a U-shaped opening 16 therein. Body 1 may be manufactured from polycarbonate or any other suitably rigid and durable plastic or other material. A flapper valve, i.e., a flexible and/or resilient valve plate 17, is inserted into the top

of body 20. Again with reference to FIG. 4, an annular strip 7 of double sided tape or other adhesive material is placed between plate 22 and the outer surface of pane 3 for securing the unidirectional valve within hole 2 and sealing the valve against pane 3. When properly installed, one end the unidirectional valve of the present invention is situated within the space formed between first pane 3 and second pane 4 and the other end of the valve is situated on the outer surface 9 of first pane 3 (see FIGS. 2-3).

[0021] FIG. 7 depicts the first exemplary embodiment of the valve of the present invention installed within a thermal window unit as part of a system for effectively ventilating the air space between the glass panes of the window. This system includes at least one valve installed in the inward facing (i.e., on the inside of a building) pane in an upward orientation and at least one valve installed in the outward facing pane (i.e., on the outside of a building) in a downward orientation. The valve or valves installed in the inward facing pane are installed near the bottom of the window and the valve or valves installed in the outward facing pane are installed near the top of the window. As the sun heats the window throughout the day, water that has condensed within the space between the panes evaporates thereby causing the fluid pressure within the air space between the panes to increase and eventually exceed the fluid pressure on the exterior of the window. When the interior fluid pressure exceeds the exterior fluid pressure, one end (i.e., the non-hinged end) of valve plate 17 separates from flange 11, thereby opening the valves (indicated in broken lines in FIG. 7). As depicted in FIG. 7, once the valves are open, air flows from the interior of the building through the valves installed in inward facing pane, upward through the interior space between the panes, and then exits through the valves installed in the outward facing pane. This airflow effectively reduces amount of moisture laden air (i.e., humidity) in the air space between the panes; thus, the amount of condensation occurring within the window is significantly reduced or eliminated.

[0022] In a version of this invention not shown in the Figures, the first exemplary embodiment of the valve of the present invention is again installed within a thermal window unit as part of a system for ventilating the air space between the glass panes of the window. However, in this embodiment, at least one valve is installed in the outward facing pane (i.e., on the outside of a building) in an upward orientation near the bottom of the window, and at least one valve is